



Lithium Thionyl Chloride Battery Brief Datasheet Model: ER261020M



1. Basic Specification (Typical values relative to cells stored for one year or less at +30°C Max.)



Item	Parameters	Remark
Model	ER261020M, CC	High power type
Nominal Capacity(mAh)	13000	at 14mA +23°C, 2.0V cut-off
Nominal Voltage(V)	3.6	3.65V-3.67V
Standard discharge current (mA)	14	
Maximum continuous current(mA)	1400	
Maximum pulse current(mA)	2800	
Operating temperature range(°C)	-55~+85	
Storage temperature(recommended)	+30°C Max.	
Weight(g)	108.0	
Customized a variety of JST/MOLEX/ORTHER etc. connector , terminal, Please contact HJBP engineer.		

*High temperature type include 125°C, 150°C, 165°C, and recommend suit for low current and medium current discharge. High power provide middle-large discharge current.

*It may require depassivation before medium currents can be delivered.

2. Electrical Characteristics and Dimension

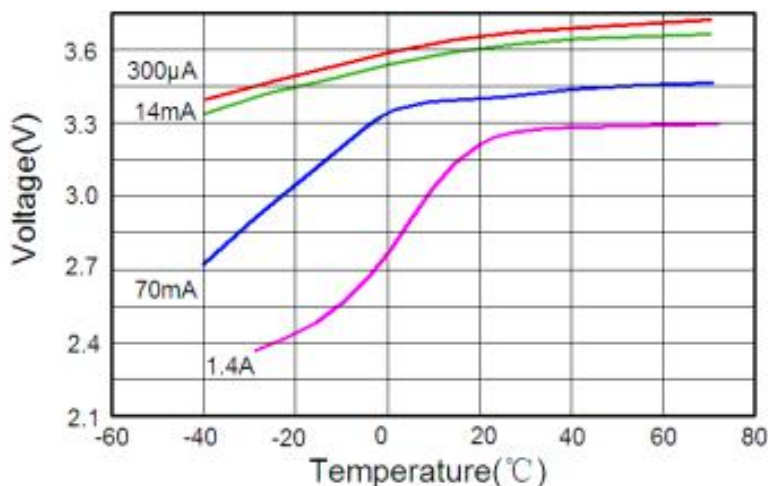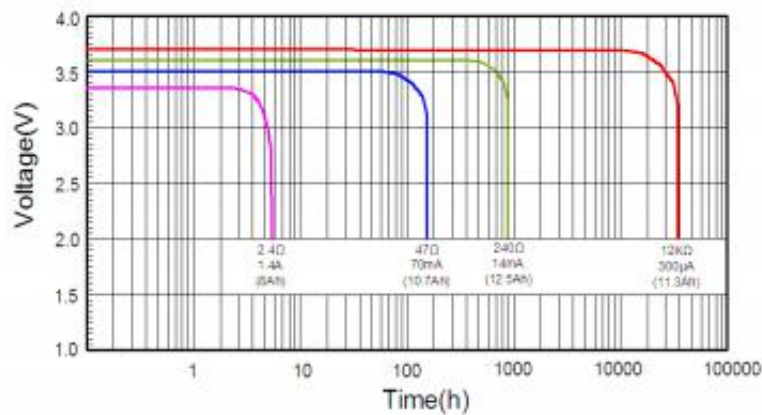

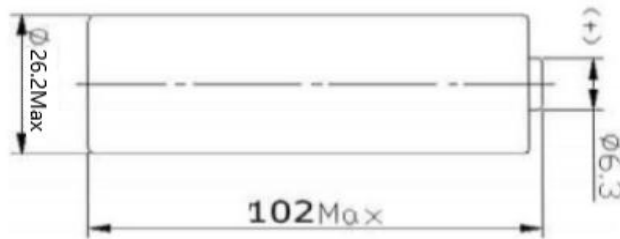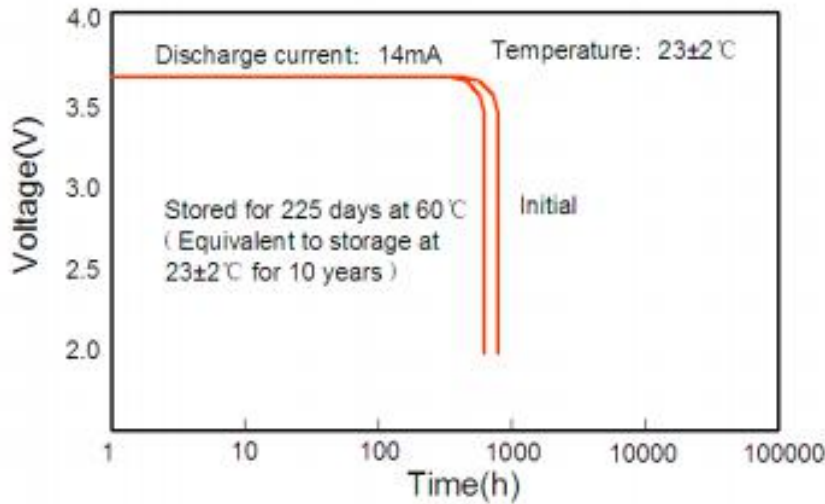

3.Key feature

- ★High and stable operating voltage.
- ★Stainless steel container
- ★Non-flammable electrolyte
- ★Hermetic glass-to-metal sealing
- ★Low self discharge rate(less than 1% after 1 year of storage at +25°C)
- ★UL1642, CE certification, UN38.3, MSDS/SGS/ROHS test reporter,ISO19001 quality control system

4.Main applications

- ★Utility metering
- ★Military electronics
- ★Memory back-up
- ★Automatic meter reading
- ★Alarms and security devices
- ★Professional electronics
- ★Automotive electronics
- ★Tollgates systems

5.Warning

- *Please Keep away Fire,explosion and severe burn hazard.
- *Please Do not recharge,crush,disassemble,heat above 100°C.
- *Please Do not solder directly to cell.

Note: Any representations in this brochure concerning performance,are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.